


- GENERAL NOTES
1. CONTRACTOR TO VERIFY ALL DIMENSIONS ON JOB SCALE.
 2. DO NOT SCALE BRISTLE CONSTRUCTION TO EXISTING CONCRETE. ALL DIMENSIONS TO DISCREPANCIES OR ERRORS TO BE REPORTED IMMEDIATELY TO SUPERVISOR FOR CLARIFICATION.
 3. ALL INTERIOR FRAME WALL DIMENSIONS TO BE 1/2" LESS THAN EXISTING DIMENSIONS.
 4. ALL EXTERIOR BLOCK WALL DIMENSIONS TO BE 3/8" LESS THAN NOTED OTHERWISE.
 5. ALL DOOR AND WINDOW THRESHOLDS TO BE SOLID WOOD DOOR NOT LESS THAN 1 3/4" IN THICKNESS, SOLID OR HONEYCOMB CORE STEEL DOORS NOT LESS THAN 1 3/8" THICK, OR 1 1/2" THICKNESS.
 6. GARAGE SHALL BE SEPARATED FROM THE RESIDENCE & ITS ATTIC MEAN BY NOT LESS THAN 6" OF CONCRETE. ALL DOOR AND WINDOW THRESHOLDS TO BE SOLID WOOD DOOR NOT LESS THAN 1 3/4" IN THICKNESS.
 7. ALL CEILING JOISTS APPLIED PERPENDICULAR TO CEILING RAFTER.
 8. SEE GENERAL NOTES PAGE FOUR FOR ADDITIONAL INFO.



EXISTING AREA CALCULATIONS	
EXISTING LIVING	1642 SF.
EXISTING GARAGE	462 SF.
EXISTING PORCH	89 SF.
EXISTING TOTAL U/R	2193 SF.
NEW AREA CALCULATIONS	
NEW AREA LIVING	1610 SF.

NEW TOTAL LIVING	SQ. FT.	3130 SF.
EXISTING GARAGE	----	462 SF.
EXISTING PORCH	----	89 SF.
NEW REAR LANAI	----	+375 SF.
NEW COV. PARKING	----	+384 SF.
NEW TOTAL U/R		4440 SF.

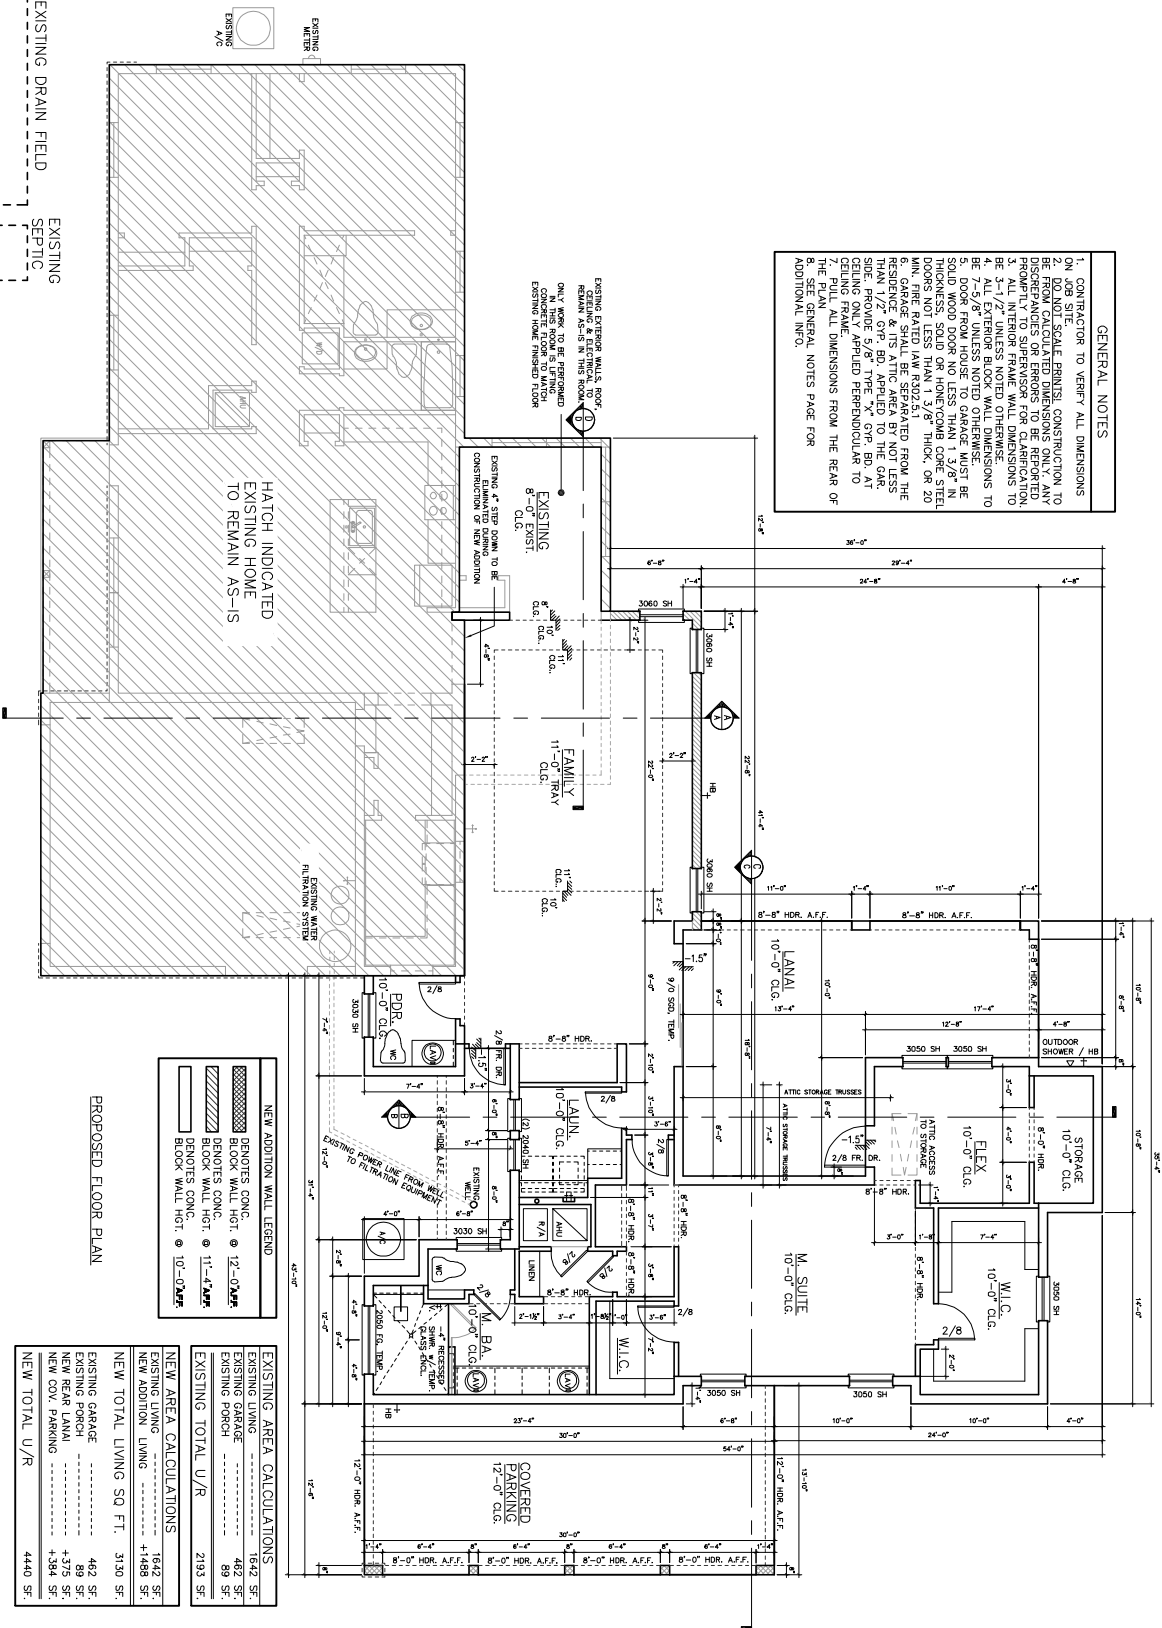