

24-8000028



SEMINOLE COUNTY **PLANNING & DEVELOPMENT DIVISION** 1101 EAST FIRST STREET, ROOM 2028 SANFORD, FLORIDA 32771 (407) 665-7371 EPLANDESK@SEMINOLECOUNTYFL.GOV

PROJ. #:

Received & paid: 2/26/24

PRE-APPLICATION

INCOMPLETE APPLICATIONS WILL NOT BE ACCEPTED

APPLICATION FEE

PRE-APPLICATION

\$50.00

PROJECT

PROJECT NAME: Sunshine Water Services AMI Gateway - Eileen Ave		
PARCEL ID #(S): 15-21-29-504-0000-0040	(EASEMENT)	
TOTAL ACREAGE: 10Sqft	BCC DISTRICT:	
ZONING: R-1A	FUTURE LAND USE: LDR	

APPLICANT

NAME: Brenda Pearce	COMPANY: Black & Veatch / Sunshine Water Services Company		
ADDRESS: 200 Weathersfield Ave			
CITY: Altamonte Springs	STATE: FL	ZIP: 32714	
PHONE: (678) 656-5179	EMAIL: Pearceb@bv.com		

CONSULTANT

NAME:	COMPANY:	
ADDRESS:		
CITY:	STATE:	ZIP:
PHONE:	EMAIL:	

PROPOSED DEVELOPMENT (CHECK ALL THAT APPLY)

	LAND USE AMENDMENT
--	--------------------

SITE PLAN SPECIAL EXCEPTION

Description of proposed development: Installing automation system for reading residential water meters with antenna

mounted on a 40ft pole in order to read the new meters remotely. Must be in a residential area in order to be close to meters.

STAFF USE ONLY					
COMMENTS DUE: 3/8	COM DOC DUE: 3/14		DRC MEETING: 3/20		
PROPERTY APPRAISER SHEET PRIOR REVIEWS:					
ZONING: R-1A	FLU: LDR	LOCATION: on the east side of Eileen Ave,			
w/s: N/A	BCC: 3: Constantine	Γ	oorth of W SR 436		



T 866.842.8432

www.sunshinewater.com

AUTHORIZATION by owner of property to agent for execution of Land Use Approvals and Building Permits.

Date 12/12/2023

The undersigned states that he/she is an owner of property in Seminole County

and that he/she authorizes Black & Veatch to execute the application and documentation to

secure Land Use Approvals and Building Permit for installation of 50-foot poles and

associated equipment for Advanced Metering Infrastructure (AMI) implementation.

115 Eileen Ave ALTAMONTE SPRINGS FL 32714 EASEMENT

(Address)

15-21-29-504-0000-0040

(Parcel ID of Property)

Brenda Pearce

Agent Name Printed

Signature of Agent 563 West Hillsborough Ave Florahome FL 32140

Address (678) 656-5179 Pearceb@bv.com

Telephone Number

Sean Twomey Owner Name Printed Signature of Owner 200 Weathersfield Av., Altamonte Springs, FI, 32714 Address 407.312.1815 Telephone Number



200 Weathersfield Avenue Altamonte Spring, Florida United States 32714

T 866.842.8432

www.sunshinewater.com

AMI PROJECT OVERVIEW

Company Overview

Sunshine Water Services Company (SWS) is a water & wastewater utility that has been operating in Florida since 1976. SWS provides service to nearly 70,000 customers across 10 different counties. In Seminole County, SWS serves approximately 15,000 premises with either water, wastewater, or both. One of our largest service areas is "Sanlando", in unincorporated Seminole County, where we serve a large portion of the Wekiva Springs area.

What is AMI?

AMI, also known as Advanced Metering Infrastructure, is a new water metering system that provides remote meter reading capabilities. AMI meters send a signal, either through cellular or to a LoRaWAN (low-power, wide area networking protocol) collector which feeds the overall system with the meter reads and other available information. AMI is designed to provide a monitoring system of water usage to residential and commercial properties, which will not only allow the water utility (SWS) to know what the usage is but will also supply the customer with data of their usage on a regular and easier-to-use basis. AMI, combined with the necessary software such as SWS My Utility Account, allows the customer to monitor their residence for leaks and to be more aware of their usage when they are not home.

SWS AMI PROJECT

SWS has contracted with meter manufacturer, Neptune, to provide AMI and it's capabilities to all SWS water customers. The AMI installation will require the replacement of older mechanical meters with AMI. There are approximately 14,750 meters in Seminole County that will be replaced with AMI prior to the end of 2024.

The upgrade to AMI technology will provide significant benefits to our customers including,

- Detection of leaks and customer notification through My Utility Account,
- Eliminates the need for manual and estimated reads,
- Reduction in high-bill cases because customers will have more information to evaluate their usage,
- Greenhouse gas reductions with the reduction of "truck rolls" to obtain manual meter reads.

The majority of AMI meters in Seminole County will use LoRaWAN technology to supply meter read data back to the system. The use of LoRaWAN requires the installation of gateway poles with specific antenna technology to collect the data for a region of AMI meters while others will be served by cellular technology.

40A8RT219DB

Round Tapered Direct Burial Aluminum Light Pole 40 Foot Above Grade, 8 Inch Diameter, 0.219 Inch Wall Thickness

PRODUCT DESCRIPTION

18 inches

24 inches

Ĝ

0 0

 $\dot{\bigcirc}$ 00

ċ . o

0 0.9

Õ

. 0

0.0

:0

O

0.0 D

0.000

0 0

0


Pole Top Options: Poles are provided with either a removable top cap or a welded aluminum tenon. A 2-3/8 inch outside diameter tenon with 4 inches in length is the most common; however, other tenon options are available. Customers should confirm the appropriate tenon size required by their project prior to ordering. Poles with a top cap can also be drilled during fabrication. The drill pattern and orientation need to be provided by the customer unless Energy Light fixtures are being used for the project.

Pole Shaft: The pole shaft will be constructed of seamless extruded tube of 6063 aluminum alloy per the requirements of ASTM B221. The shaft assembly shall be full-length heat treated to produce a T6 temper.

Handhole: A reinforced handhole with grounding provision is provided at 18 inches from the base end of the pole assembly. Each handhole includes a cover and the attachment hardware.

Color and Finish Options: The standard finish for our aluminum light poles is a natural aluminum finish. Our poles are also available with a commercial grade, powder coat finish for an additional charge. Standard color options include dark bronze, black, gray, green, and white; however, custom color options are also available.

Other Options: The Following options are available. Please consult one of our light pole experts for details: Custom tenon size, custom color, electric/GFI outlet, custom pole height and additional handholes. Anti-Rotational Modification is also an option. Poles will be partially flattened into an anti-rotational, oval cross section, for added stability.

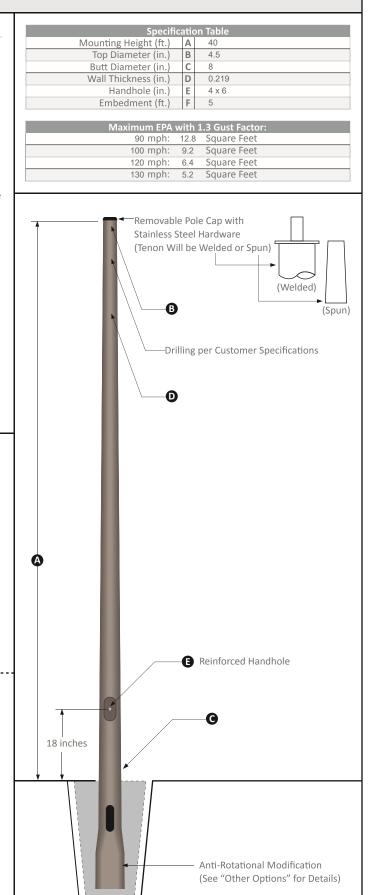

Copyright © 2019 Energy Light, Inc. All Rights Reserved. | 800 E. Northwest Highway, Palatine, IL 60074

Ground Line

Wire Access Slots $1-3/4 \times 6$ inches

(2 at 180°)

1 to 2

Feet

Flattened

•

0 \bigcirc

0.0.

0.0

. . . . D

· 0

د ٥ ٥

0.0 .0.0

0.00

0

0

Product datasheet Characteristics

SO1020M100S





Product or component type	All-In-One
Range of product	Homeline
Meter socket type	Ringed
Hub type	A

Complementary

Line Rated Current	100 A	
Short-circuit current	10 kA	
Device mounting	Surface	
Number of spaces	10	
Number of circuits	20	
Number of tandem circuit breakers	10	
Electrical connection	Lugs line side Lugs service ground	
AWG gauge	AWG 6AWG 1 (aluminium/copper) line side AWG 8AWG 4 (aluminium/copper) service ground	
Device composition	Service disconnect (factory installed)	
Service disconnect rated current	100 A	
Branch circuit breaker rated current	80 A	
Service feed location	ОН	
Bypass type	No bypass	

Environment

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0944 - Schneider Electric declaration of conformity	Compliant - since 0944 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

Contractual warranty

Warranty period

18 months



NON CELLULAR OMNIDIRECTIONAL BASE STATION ANTENNAS **Fiberglass Omnidirectional Antennas**



MFB9155



MMK3



MMK1



MMK4



MBSWM





900/800 MHz MAXRAD Fiberglass Base Station (MFB) Omnidirectional Antennas

The MFB 900/800 MHz series are base matched half wave antennas encapsulated in heavy duty fiberglass radomes with a thick walled aluminum mounting base for reliable long term use. All models are DC grounded and UPS shippable.

Features

- White ultra-violet resistant pultruded fiberglass radome
- Thick walled aluminum mounting base
- Unity/3 dB/5 dB/7 dB models
- UPS shippable
- · Factory tuned



Technical Data

Maximum Power: 150 watts
Normal Impedance: 50 ohms
Radome Material: 1.0" OD pultruded white fiberglass
Radiator Material: Coated steel wire
ESD Protection: DC grounded
Wind Survival: 100 mph
Termination: Unity and 3 dB models, N Female
Mounting Base Diameter: 1-5/16"
Mounting Method: Mast or wall mounted. Mounting hardware is sold separately. MMK1: light duty mast mount for antennas under 30" MMK3: light duty mast mount for antennas over 30" MMK4: heavy duty mast mount MMK6: cast mounting bracket MMK9: Aluminum mast mount for 1-5/16" OD antennas MBSWM: wall mounting bracket for antennas over 30" (two are required)

Antenna Electrical Specifications

Model	Frequency Range	Factory Tuned Frequency	Gain	Bandwidth @ 1.5:1 VSWR	Vertical Beamwidth @ 1/2 Power
MFB8130	806-866 MHz	813 MHz	Unity	40 MHz	75°
MFB8133	806-866 MHz	813 MHz	3 dB	30 MHz	40°
MFB8135	806-866 MHz	813 MHz	5 dB	20 MHz	22°
MFB8580	806-866 MHz	858 MHz	Unity	40 MHz	75°
MFB8583	806-866 MHz	858 MHz	3 dB	30 MHz	40°
MFB8585	806-866 MHz	858 MHz	5 dB	20 MHz	22°
MFB8353	824-896 MHz	835 MHz	3 dB	30 MHz	40°
MFBW8903	890-960 MHz	N/A	3 dB	70 MHz	40°
MFBW8905	890-960 MHz	N/A	5 dB	70 MHz	22°
MFB8963	896-940 MHz	898 MHz	3 dB	30 MHz	40°
MFB8965(NF)	896-940 MHz	898 MHz	5 dB	20 MHz	22°
MFB9387	896-940 MHz	938 MHz	7 dB	20 MHz	17°
MFB8967(NF)	896-940 MHz	898 MHz	7 dB	20 MHz	17°
MFB9150	902-928 MHz	915 MHz	Unity	20 MHz	75°
MFB9153	902-928 MHz	915 MHz	3 dB	20 MHz	40°
MFB9155(NF)	902-928 MHz	915 MHz	5 dB	20 MHz	22°
MFB9155RPC	902-928 MHz	915 MHz	5 dB	20 MHz	22°
MFB9157(NF)*	902-928 MHz	915 MHz	7 dB	20 MHz	17°

* Bandwidth @ 2.0:1 VSWR



TANDINE PRESS

Oakip

Fiences Dr

189.00

115 Eileen Ave

ace B

Elleen Av







110

10

110 8

14

104

3 140

2

eld Ave

431

W Sr 436

55 154

56₁₅₂

57150]

58,40

52

104

0

U

עולוולוול

Rin

9

Oak Dr

201 1 140.42

40.5 115 22

23 140.08 1

140.70 25¹¹¹

26

141.05

28

29 141.23

30 141.32

Property Address

143

42

4111

140

-109.09 391

38

3712

15

35 417

34

R 31

33 193.62

369 2 32 30 8 113.9 113.9

36

54

531

49:

2901

ay Dr 5 116

51

27

6

54

3 108 2

2 2 2

100

Gerry Dr

8

1619

1558

149

143

637

-153

129 74

125

2

134.5

399 1

W Sr 436

Parcel Location

137

36

35

4

6

Ø

<u>8</u> 8 30

26

27154

28

290

31

32

33

34

ALTAMONTE SPRINGS, FL 32714

Site View

Sorry, No Image Available at this Time

Parcel Information	Value Summary				
Parcel 15-21-29-504-0000-0040		2024 Working Values	2023 Certified Values		
Owner(s) DOT/STATE OF FLA					
Property Address ALTAMONTE SPRINGS, FL 32714	Valuation Method	Cost/Market	Cost/Market		
Mailing 719 S WOODLAND BLVD DELAND, FL 32720-6834	Number of Buildings	0	0		
Subdivision Name GRACEVILLA HEIGHTS	Depreciated Bldg Value				
Tax District 01-COUNTY-TX DIST 1	Depreciated EXFT Value				
DOR Use Code 80-VACANT GOVERNMENT	Land Value (Market)				
	Land Value Ag				
Exemptions 90-STATE(2007) AG Classification No	Just/Market Value	\$0	\$0		
Facility Name RETENTION	Portability Adj				
	Save Our Homes Adj	\$0	\$0		
	Non-Hx 10% Cap (AMD 1)	\$0	\$0		
	P&G Adj	\$0	\$0		

	Assessed Value	\$0	\$0
2023 Certified Tax Summary			
2023 Tax Amount w/o Exemptions/Cap	\$0.00		
2023 Tax Bill Amount	\$0.00		
	Does NOT INCLUDE Non Ad Valorem Assessments		

Legal Description

LOTS 4 5 & 6 **GRACEVILLA HEIGHTS** PB 11 PG 94 & LOTS 30 TO 33 SHADY OAKS PB 11 PG 24

Taxes						
Taxing Authority		Assessme	nt Value	Exempt Va	lues	Taxable Value
ROAD DISTRICT			\$0		\$0	\$0
SJWM(Saint Johns Water Management)			\$0		\$0	\$0
FIRE			\$0		\$0	\$0
COUNTY GENERAL FUND			\$0		\$0	
Schools			\$0	\$0		\$0
Sales						
Description	Date	Book	Page	Amount	Qualified	Vac/Imp
WARRANTY DEED	08/01/1998	03484	1811	\$100	No	Improved
WARRANTY DEED	01/01/1972	00948	1328	\$35,900	Yes	Improved
Land						
Method	Frontage	De	pth	Units	Units Price	Land Value
ACREAGE				2.212	\$0.00	
Building Information						
Permits						
Permit # Description			Agency	Amour	nt CO Date	Permit Date

Extra Features				
Description	Year Built	Units	Value	New Cost

Zoning								
Zoning	Zoning Description		ption	Future Land Use		Future Land Use Description		
R-1A		Low Density Re	sidential	LDR		Single Family-9000		
Utility In	format	tion						
Fire Station	Power	Phone(Analog)	Water Provider	Sewer Provider	Garbage Pickup	Recycle	Yard Waste	Hauler
12.00	DUKE	CENTURY LINK	NA	NA	NA	NA	NA	NA
Political Representation								
Commissione	r	US Congress	State House	S	tate Senate	Vo	ting Precinct	
Dist 3 - Lee Con	stantine	Dist 7 - Cory Mills	Dist 38 - DAVID	SMITH D	ist 10 - Jason Brodeur	42		
School Information								
Elementary School District		Middle School District		High School District				
Spring Lake		Milwee		Lyman				
		Copyr	lght 2024 © Sem	hinole County Pre	operty Appraiser			

·) · · 3



Seminole County Government Development Services Department Planning and Development Division Credit Card Payment Receipt

If you have questions about your application or payment, please email us <u>eplandesk@seminolecountyfl.gov</u> or call us at: (407) 665-7371.

Receipt Details

Date:	2/26/2024 7:31:49 PM
Project:	24-80000028
Credit Card Number:	42********9173
Authorization Number:	097434
Transaction Number:	26022402C-2E088779-DA4C-4AD3-B123-220D85111724
Total Fees Paid:	52.50

Fees Paid

Description	Amount
CC CONVENIENCE FEE PZ	2.50
PRE APPLICATION	50.00
Total Amount	52.50