PROJ. #: ROW 15 N HUNT CLUB BLVD

Received: 2/29/24



**SEMINOLE COUNTY** PLANNING & DEVELOPMENT DIVISION 1101 EAST FIRST STREET, ROOM 2028

Paid: 3/5/24

SANFORD, FLORIDA 32771

(407) 665-7371 EPLANDESK@SEMINOLECOUNTYFL.GOV

# **PRE-APPLICATION**

# **INCOMPLETE APPLICATIONS WILL NOT BE ACCEPTED APPLICATION FEE ▽** PRE-APPLICATION \$50.00 **PROJECT Hunt Club Blvd** PROJECT NAME: Sunshine Water Services AMI Gateway 06-21-29-5DH-0C00-0000 PARCEL ID #(S): 33-20-29-506-0C00-0010 (EASEMENT) TOTAL ACREAGE: 10Sqft BCC DISTRICT: 3: Constantine 5.15 ZONING: PD FUTURE LAND USE: PD APPLICANT NAME: Brenda Pearce COMPANY: Black & Veatch / Sunshine Water Services Company ADDRESS: 200 Weathersfield Ave CITY: Altamonte Springs STATE: FL ZIP: 32714 PHONE: (678) 656-5179 EMAIL: Pearceb@bv.com **CONSULTANT** NAME: COMPANY: ADDRESS: CITY: ZIP: STATE: PHONE: EMAIL: PROPOSED DEVELOPMENT (CHECK ALL THAT APPLY)

SUBDIVISION ☐ LAND USE AMENDMENT **☐** REZONE **✓** SITE PLAN **☐** SPECIAL EXCEPTION Description of proposed development: Installing automation system for reading residential water meters with antenna mounted on a 40ft pole in order to read the new meters remotely. Must be in a residential area in order to be close to meters.

**STAFF USE ONLY** 3/21 COMMENTS DUE: 3/15 COM DOC DUE: DRC MEETING: 3/27 PROPERTY APPRAISER SHEET PRIOR REVIEWS: PD FLU: PD ZONING: LOCATION: on the southeast corner of Wekiva Trl, and Hunt Club Blvd **BCC: 3: Constantine Sunshine Water** W/S:





T 866.842.8432

www.sunshinewater.com

# **AUTHORIZATION** by owner of property to agent for execution of Land Use Approvals and Building Permits.

Date <u>12/12/2023</u>					
The undersigned states that he/she is an	owner of property in Seminole County				
and that he/she authorizes Black & Veato	ch to execute the application and documentation to				
secure Land Use Approvals and Building	Permit for installation of 50-foot poles and				
associated equipment for Advanced Met	ering Infrastructure (AMI) implementation.				
197 N HUNT CLUB E	BLVD LONGWOOD, FL 32779 EASEMENT				
	(Address)				
06	-21-29-5DH-0C00-0000				
(Pa	arcel ID of Property)				
Brenda Pearce	Sean Twomey				
Agent Name Printed	Owner Name Printed				
Signature of Agent 563 West Hillsborough Ave Florahome FL 32140  Signature of Owner 200 Weathersfield Av., Altamonte Springs					
Address (678) 656-5179 Pearceb@bv.com	Address 407.312.1815				
lephone Number Telephone Number					



200 Weathersfield Avenue Altamonte Spring, Florida United States 32714

T 866.842.8432

www.sunshinewater.com

# **AMI PROJECT OVERVIEW**

# **Company Overview**

Sunshine Water Services Company (SWS) is a water & wastewater utility that has been operating in Florida since 1976. SWS provides service to nearly 70,000 customers across 10 different counties. In Seminole County, SWS serves approximately 15,000 premises with either water, wastewater, or both. One of our largest service areas is "Sanlando", in unincorporated Seminole County, where we serve a large portion of the Wekiva Springs area.

### What is AMI?

AMI, also known as Advanced Metering Infrastructure, is a new water metering system that provides remote meter reading capabilities. AMI meters send a signal, either through cellular or to a LoRaWAN (low-power, wide area networking protocol) collector which feeds the overall system with the meter reads and other available information. AMI is designed to provide a monitoring system of water usage to residential and commercial properties, which will not only allow the water utility (SWS) to know what the usage is but will also supply the customer with data of their usage on a regular and easier-to-use basis. AMI, combined with the necessary software such as SWS My Utility Account, allows the customer to monitor their residence for leaks and to be more aware of their usage when they are not home.

# **SWS AMI PROJECT**

SWS has contracted with meter manufacturer, Neptune, to provide AMI and it's capabilities to all SWS water customers. The AMI installation will require the replacement of older mechanical meters with AMI. There are approximately 14,750 meters in Seminole County that will be replaced with AMI prior to the end of 2024.

The upgrade to AMI technology will provide significant benefits to our customers including,

- Detection of leaks and customer notification through My Utility Account,
- Eliminates the need for manual and estimated reads,
- Reduction in high-bill cases because customers will have more information to evaluate their usage,
- Greenhouse gas reductions with the reduction of "truck rolls" to obtain manual meter reads.

The majority of AMI meters in Seminole County will use LoRaWAN technology to supply meter read data back to the system. The use of LoRaWAN requires the installation of gateway poles with specific antenna technology to collect the data for a region of AMI meters while others will be served by cellular technology.



804 Lincoln Avenue • Saint Paul, MN 55105 (612) 990-0266

February 27, 2024

Mark Kuiper LightMart

Re: Design Memo – PCTEL antenna pole, Orlando

Mark:


The attached calculations demonstrate conformance of the proposed pole assembly to the requirements of the 2023 Florida Building Code, based on a 160 mph design wind speed. The pole assembly has additional structural capacity to withstand wind speeds well above this level. In the very unlikely event that wind speeds increase to a level causing failure, the pole would likely buckle at the handhole location, forming a hinge at that location and causing the pole to deflect above that point, and remain in a deflected position.

Regards,

I HEREBY CERTIFY THAT THIS REPORT WAS PREPARED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF FLORIDA

Chris Arlandson, P.E

Enclosure: Pole wind analysis

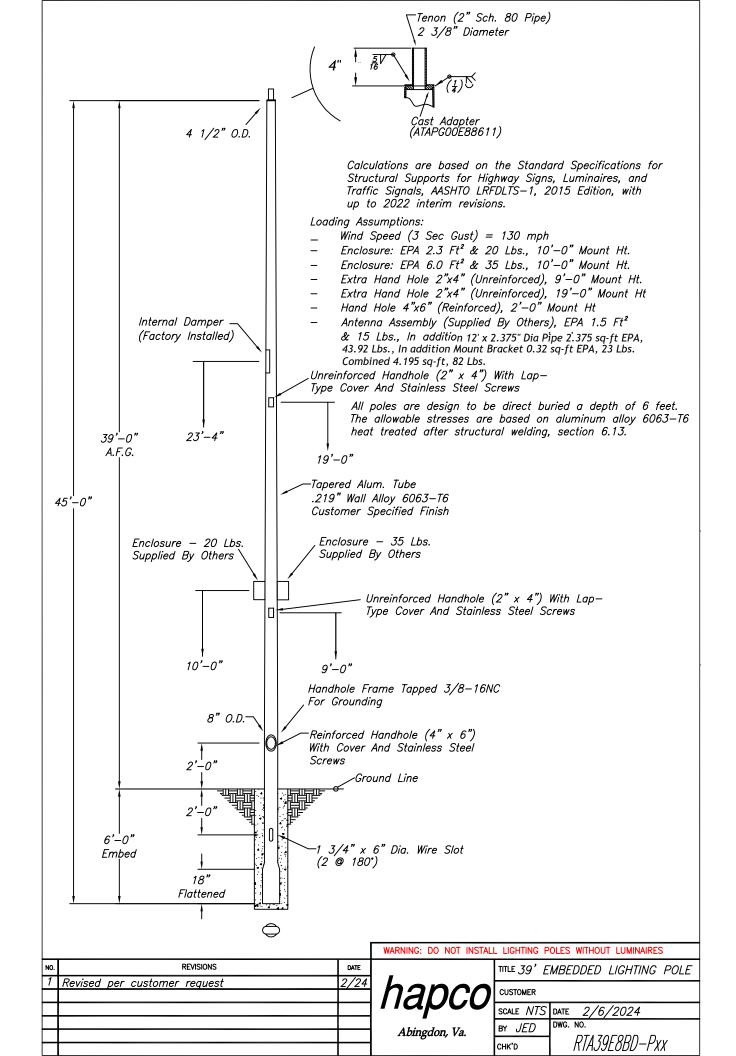

PCTEL ANTENNA POLE, Orlando February 27, 2024 Project Name: Work Order No.: SO148306 Pole Cat. No.: MODIFIED Part Number: RTA39E8BD pole + MFB9155 antenna INPUT DATA Design Standard: (ASD Design, 3-sec. gust wind speed) 2020 FBC ALUMINUM Pole Material: ALUMINUM Base Plate Material: ALUMINUM Pole Material Specification: 356T6 6063T6 6063T6 Base Plate Material Spec.: 356T6 Pole Shaft Shape: ROUND ROUND **Bolt Material Specification:** F1554 Gr 55 F1554 Gr 55 Rooftop Mounted: Weld Electrode Spec.: RE4043 Wind Velocity: (V) 160 mph Pole Ultimate Strength 85% Table A.3.4 25500 psi Exposure Category: Pole Yield Strength 85% Table A.3.4 21250 psi Structure Category: ш Plate All. Bending Stress 6700 Pole Natural Frequency (n1) 1.093 RIGID Gust Factor: (G): 0.85 Sec. 26.9.5 Pole Length: (L) 39 39 ft. Compressive Yield Strength 85% Table A.3.4 21250 psi Pole Base Height AGL: Shear Ultimate Strength 85% Table A.3.4 16150 ft. psi Tip Width: (b<sub>t</sub>) 4.5 4.50 in. Shear Yield Strength 85% Table A.3.4 11900 psi Butt Width: (b<sub>b</sub>) 8.00 in. Nom. Wall Thickness: (t) 0.219 0.2190 in. Dampening Factor: (β) 0.02 Antenna+Arm 2 enclosures meter encl. ft.2 MAX. EPA Hgt. from Tip -29 ft. Weight lbf Offset

### CALCULATED PROPERTIES

Cross-Sectional Area: (A)	5.35	in <sup>2</sup>
Butt Section Modulus: (S <sub>sq</sub> )	10.1	in³
Butt Section Mod Diag.: (S <sub>diag</sub> )	10.1	in³
Weight of Pole	188.8	lbf
Bolt Area Excl. Thread	0.00	in <sup>2</sup>


### WIND LOAD ANALYSIS

							Kd	= 0.95	Table 26.6-1			
Segment	$A_{sq}$	$A_{diag}$	Centroid Hgt	Kz	Cf (sq)		qz (sq)		F (sq)		GLM (sq)	
	ft²	ft <sup>2</sup>	ft				psf		lbf		ft*lbf	
				Table 29.3.1	Fig. 29	1.5-1	qz = 0.00256	*Kz*Kzt*Kd*(V^2)	F = qz *	G * Cf * A	GLM = F * C	entroid Hgt
1	9.16	9.16	7.5	0.85	0.70		52.9		288		2163	
2	2.68	2.68	17.5	0.88	0.70		54.6		87		1523	
Fixture @ Tip	2.7		46	1.07	1		66.9		154		7064	
Attachment 2	1.5		10	0.85	1	1	52.9	52.9	67	67	693	675
Attachment 3	0.9		5	0.85	1	1	52.9	52.9	40	40	208	202
								Summation 5	637		11651	

# COMPONENT ANALYSES

Р	O	L	Ē

Orthogonal Bending Axial Shear	Actual Stress 8275 66 119	/ All. Stress 24049 17129 6462	psi psi psi	Unity Check(s) fb/Fb fa/Fa fv/Fv	0.34 0.00 0.02



### POLE BASE ANALYSIS

d = proposed embedment, ft	A = 2.34P/S <sub>1</sub> b	P = applied lateral force, lbs
b = diagonal dimension of emb	edded portion (	taken @ 2/3 emedment depth), ft
h = distance from ground to ap	plication of resu	ltant "P" (h= ΣM/ΣP), ft

d, ft.	P, lb.	S1	b, ft.	A, ft2	ΣM, lb-ft	h, ft.	d <sub>req, ft.</sub>
6	637	1005	1.33	1.12	11651	18.29	5.5
	LATERAL	BEARING value=	250*	*double for isolat	ed poles		

16" dia. backfill w/compacted 57 stone; 6' embedment OK? YES



# 40K8FOD9DB

## Round Tapered Direct Burial Aluminum Light Pole 40 Foot Above Grade, 8 Inch Diameter, 0.219 Inch Wall Thickness

### PRODUCT DESCRIPTION

18 inches

24 inches

00.00

0.0

000

2.00

Pole Top Options: Poles are provided with either a removable top cap or a welded aluminum tenon. A 2-3/8 inch outside diameter tenon with 4 inches in length is the most common; however, other tenon options are available. Customers should confirm the appropriate tenon size required by their project prior to ordering. Poles with a top cap can also be drilled during fabrication. The drill pattern and orientation need to be provided by the customer unless Energy Light fixtures are being used for the project.

Pole Shaft: The pole shaft will be constructed of seamless extruded tube of 6063 aluminum alloy per the requirements of ASTM B221. The shaft assembly shall be full-length heat treated to produce a T6 temper.


Handhole: A reinforced handhole with grounding provision is provided at 18 inches from the base end of the pole assembly. Each handhole includes a cover and the attachment hardware.

Color and Finish Options: The standard finish for our aluminum light poles is a natural aluminum finish. Our poles are also available with a commercial grade, powder coat finish for an additional charge. Standard color options include dark bronze, black, gray, green, and white; however, custom color options are also available.

Other Options: The Following options are available. Please consult one of our light pole experts for details: Custom tenon size, custom color, electric/GFI outlet, custom pole height and additional handholes. Anti-Rotational Modification is also an option. Poles will be partially flattened into an anti-rotational, oval cross section, for added stability.

Specification Table					
Mounting Height (ft.)	Α	40			
Top Diameter (in.)	В	4.5			
Butt Diameter (in.)	С	8			
Wall Thickness (in.)	D	0.219			
Handhole (in.)	Е	4 x 6			
Embedment (ft.)	F	5			

Maximum EPA	with 1	1.3 Gust Factor:
90 mph:	12.8	Square Feet
100 mph:	9.2	Square Feet
120 mph:	6.4	Square Feet
130 mph:	5.2	Square Feet

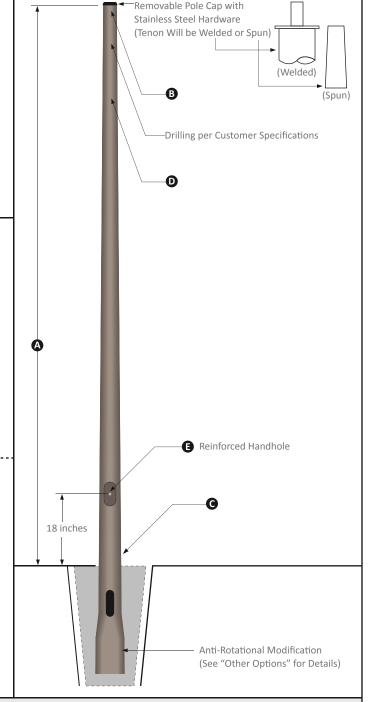

Ground Line

Wire Access Slots  $1-3/4 \times 6$  inches

(2 at 180°)

1 to 2

Feet Flattened

# Fiberglass Omnidirectional Antennas



# 900/800 MHz MAXRAD Fiberglass Base Station (MFB) Omnidirectional Antennas

The MFB 900/800 MHz series are base matched half wave antennas encapsulated in heavy duty fiberglass radomes with a thick walled aluminum mounting base for reliable long term use. All models are DC grounded and UPS shippable.

## **Features**

- White ultra-violet resistant pultruded fiberglass radome
- Thick walled aluminum mounting base
- Unity/3 dB/5 dB/7 dB models
- · UPS shippable
- · Factory tuned



# **Technical Data**





MMK3 MMK1









MMK9

Maximum Power: 150 watts Normal Impedance: 50 ohms

Radome Material: 1.0" OD pultruded white fiberglass

Radiator Material: Coated steel wire ESD Protection: DC grounded Wind Survival: 100 mph

Termination:

Unity and 3 dB models, N Female Mounting Base Diameter: 1-5/16"

Mounting Method:

Mast or wall mounted.

Mounting hardware is sold separately.

MMK1: light duty mast mount for antennas under 30" MMK3: light duty mast mount for antennas over 30"

MMK4: heavy duty mast mount MMK6: cast mounting bracket

MMK9: Aluminum mast mount for 1-5/16" OD antennas

MBSWM: wall mounting bracket for antennas over 30" (two are required)

**MBSWM** 

# NON CELLULAR OMNIDIRECTIONAL BASE STATION ANTENNAS

# Fiberglass Omnidirectional Antennas

# **Antenna Electrical Specifications**

Model	Frequency Range	Factory Tuned Frequency	Gain	Bandwidth @ 1.5:1 VSWR	Vertical Beamwidth @ 1/2 Power
MFB8130	806-866 MHz	813 MHz	Unity	40 MHz	75°
MFB8133	806-866 MHz	813 MHz	3 dB	30 MHz	40°
MFB8135	806-866 MHz	813 MHz	5 dB	20 MHz	22°
MFB8580	806-866 MHz	858 MHz	Unity	40 MHz	75°
MFB8583	806-866 MHz	858 MHz	3 dB	30 MHz	40°
MFB8585	806-866 MHz	858 MHz	5 dB	20 MHz	22°
MFB8353	824-896 MHz	835 MHz	3 dB	30 MHz	40°
MFBW8903	890-960 MHz	N/A	3 dB	70 MHz	40°
MFBW8905	890-960 MHz	N/A	5 dB	70 MHz	22°
MFB8963	896-940 MHz	898 MHz	3 dB	30 MHz	40°
MFB8965(NF)	896-940 MHz	898 MHz	5 dB	20 MHz	22°
MFB9387	896-940 MHz	938 MHz	7 dB	20 MHz	17°
MFB8967(NF)	896-940 MHz	898 MHz	7 dB	20 MHz	17°
MFB9150	902-928 MHz	915 MHz	Unity	20 MHz	75°
MFB9153	902-928 MHz	915 MHz	3 dB	20 MHz	40°
MFB9155(NF)	902-928 MHz	915 MHz	5 dB	20 MHz	22°
MFB9155RPC	902-928 MHz	915 MHz	5 dB	20 MHz	22°
MFB9157(NF)*	902-928 MHz	915 MHz	7 dB	20 MHz	17°

PCTEL, Inc.

<sup>\*</sup> Bandwidth @ 2.0:1 VSWR

# SO1020M100S





### Main

Product or component type	All-In-One
Range of product	Homeline
Meter socket type	Ringed
Hub type	A

# Complementary

- Compromerry		
Line Rated Current	100 A	
Short-circuit current	10 kA	
Device mounting	Surface	
Number of spaces	10	
Number of circuits	20	
Number of tandem circuit breakers	10	
Electrical connection	Lugs line side Lugs service ground	
AWG gauge	AWG 6AWG 1 (aluminium/copper) line side AWG 8AWG 4 (aluminium/copper) service ground	
Device composition	Service disconnect (factory installed)	
Service disconnect rated current	100 A	
Branch circuit breaker rated current	80 A	
Service feed location	ОН	
Bypass type	No bypass	


## **Environment**

# Offer Sustainability

Green Premium product	Green Premium product	
Compliant - since 0944 - Schneider Electric declaration of conformity	Compliant - since 0944 - Schneider Electric declaration of conformity	
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold	
Available	Available	:
Need no specific recycling operations	Need no specific recycling operations	

# Contractual warranty

Warranty period	18 months

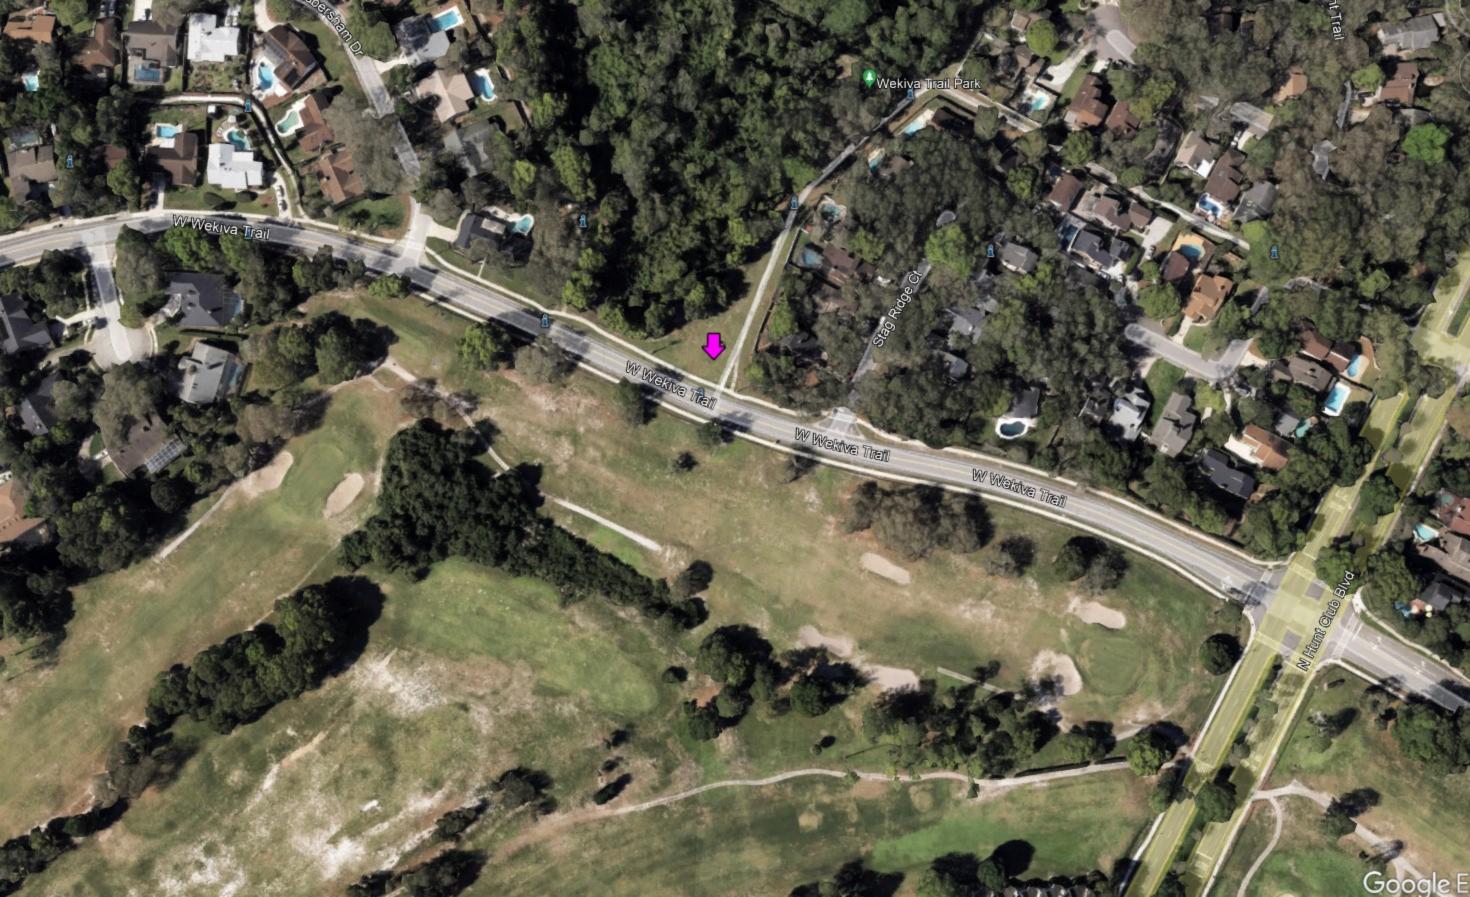

# Property Re or r



P r e 06-21-29-5DH-0C00-0000

Property A ress 197 N HUNT CLU LVD LONGWOOD, FL 32779



# Prelform tion Pre 06-21-29-5DH-0C00-0000 Oer(s) WEKIVA HUNT CLU COMMUNITY ASSN INC Property A ress 197 N HUNT CLU LVD LONGWOOD, FL 32779 Mii 197 N HUNT CLU LVD LONGWOOD, FL 32779-4657 Sub ivisio N me WEKIVA HUNT CLU 3 FOX HUNT SEC 3 Tx Distrit 01-COUNTY-TX DIST 1 DOR Use o e 09-RESIDENTIAL COMMON ELEMENTS/AREAS Exemptio s None AG ssifi tio No Fity N me WEKIVA HILLS PARK

	2024 Working V ues	2023 ertifie V ues
V u tion Metho	Cost/Market	Cost/Market
Number of Bui ings	1	1
Depre i te B gV ue		
Depre i te EXFT V ue		
L n V ue (M rket)		
L n V ue Ag		
Just/M rket V ue	\$0	\$0
Port bi ity A j		
S ve Our Homes A j	\$0	\$0
Non-Hx 10% p (AMD 1)	\$0	\$0
P&G A j	\$0	\$0
Assesse V ue	\$0	\$0

V ue Summ ry

# 2023 ertifie T x Summ ry

2023 T x Amount w/o Exemptions/ p \$0.00 2023 T x Bi Amount \$0.00

\* Does NOT IN LUDE Non A V orem Assessments


# Leg Des ription

TRACT C WEKIVA HUNT CLU FOX HUNT SEC 3 P 18 PGS 88 TO 92

February 28, 2024 03:08 PM P ge 1/3

Taxes						
Taxing ri y		ssessmer	n Val e	Exemp V	al es	Taxable Val e
ROAD DISTRICT			\$		\$	\$
SJWM(Saint Johns Water Management)			\$		\$	\$
FIRE			\$		\$	\$
COUNTY GENERAL FUND			\$		\$	\$
Schools			\$		\$	\$
Sales						
Descrip i n	Da e	k	Page	m n	Q alified	Vac/Imp
QUIT CLAIM DEED	1/ 1/1974	1 2	162	\$1	No	Vacant
Land						
Me d	Fr n age	De	p	Uni s	Uni s Price	Land Val e

В	B ilding Inf rma i n								
#	Description	Year Built Actual/Effective	Stories	Total SF	Ext Wall	Adj Value	Repl Value	Appendages	
1	MASONRY PILASTER .	2 9	1	1288.	CONCRETE BLOCK-STUCCO - MASONRY	\$	\$	Descrip i n	rea
		_						OPEN PORCH FINISHED	55.00
			28	7				OPEN PORCH FINISHED	55.00
				OPF =					



Building 1 - Page 1

Permi s								
Permi #	Descrip i n	gency	m n	CO Da e	Permi Da e			
73 9	NEW COMMUNITY CENTER	County	\$147,		7/9/2 8			
4925	197 N HUNT CLUB BLVD: REROOF COMMERCIAL- [WEKIVA HUNT FOX HU]	CLUB 3 County	\$5,984		4/15/2 2			
Ex ra	Fea res							
Descrip i	n	Year Bil	Uni s	Val e	New C s			
COMM: TEI	NNIS COURT	2/ 1/2 9	12,96	\$				

February 28, 2024 03:08 PM Page 2/3

Zoning	Zoning Des i	i ion u u e Land Use			u u e Land Use Des i ion		
PD	Planned Develo	pment	PD		Planned Development		
Uiiy nfo mai	on						
i e S a ion Po e	Phone(Ana og)	Wae Poide	Se e P o ide	Ga bage Pi ku	Re y e	Ya d Was e	Hau e
13.00 DUKE	CENTURY LINK	SUNSHINE WATER SERVICES	SUNSHINE WATER SERVICES	NA	NA	NA	NA
Poii a Re es	en a ion						
Commissione	US Cong ess	S a e House	S	a e Sena e	Vo	ing Pein	
Dist 3 - Lee Constantine	Dist 7 - Cory Mills	Dist 39 - DOUG E	BANKSON Dis	t 10 - Jason Brodeur	34		
S hoo nfo ma	ion						
Eemen ay Shoo Disi		Midd e S hoo Dis i		High S	hoo Dis i		
Wekiva	1	Гeague		Lake Brar	ntley		

Copyright 2024 © Se inole County Property Appraiser

February 28, 2024 03:08 PM Page 3/3



Seminole County Government
Development Services Department
Planning and Development Division
Credit Card Payment Receipt

If you have questions about your application or payment, please email us <a href="mailto:eplandesk@seminolecountyfl.gov">eplandesk@seminolecountyfl.gov</a> or call us at: (407) 665-7371.

# **Receipt Details**

**Date:** 3/5/2024 9:38:25 AM

**Project:** 24-80000039

**Credit Card Number:** 42\*\*\*\*\*\*\*9173

**Authorization Number: 006889** 

**Transaction Number:** 050324C29-4F2AD2A2-16A3-4594-B305-98AF9FCAC5EF

**Total Fees Paid:** 52.50

# **Fees Paid**

Description	Amount
CC CONVENIENCE FEE PZ	2.50
PRE APPLICATION	50.00
Total Amount	52.50