



SEMINOLE COUNTY  
 PLANNING & DEVELOPMENT DIVISION  
 1101 EAST FIRST STREET, ROOM 2028  
 SANFORD, FLORIDA 32771  
 (407) 665-7371 EPLANDESK@SEMINOLECOUNTYFL.GOV

PROJ. #: ROW 16 Radenbaugh Dr

Received: 2/28/24

Paid: 3/4/24

## PRE-APPLICATION

### INCOMPLETE APPLICATIONS WILL NOT BE ACCEPTED

#### APPLICATION FEE

PRE-APPLICATION \$50.00

#### PROJECT

PROJECT NAME: Sunshine Water Services AMI Gateway [Radenbaugh Dr](#)

PARCEL ID #(S): 06-21-29-504-0000-0010 (EASEMENT)

TOTAL ACREAGE: 10Sqft BCC DISTRICT:

ZONING: PD FUTURE LAND USE: PD

#### APPLICANT

NAME: Brenda Pearce COMPANY: Black & Veatch / Sunshine Water Services Company

ADDRESS: 200 Weathersfield Ave

CITY: Altamonte Springs STATE: FL ZIP: 32714

PHONE: (678) 656-5179 EMAIL: Pearceb@bv.com

#### CONSULTANT

NAME: COMPANY:

ADDRESS:

CITY: STATE: ZIP:

PHONE: EMAIL:

#### PROPOSED DEVELOPMENT (CHECK ALL THAT APPLY)

SUBDIVISION  LAND USE AMENDMENT  REZONE  SITE PLAN  SPECIAL EXCEPTION

Description of proposed development: Installing automation system for reading residential water meters with antenna mounted on a 40ft pole in order to read the new meters remotely. Must be in a residential area in order to be close to meters.

#### STAFF USE ONLY

COMMENTS DUE: [3/15](#) COM DOC DUE: [3/21](#) DRC MEETING: [3/27](#)

PROPERTY APPRAISER SHEET  PRIOR REVIEWS:

ZONING: PD

FLU: PD

LOCATION: [on the northeast corner of Canterclub Trl, and Radebaugh Dr](#)

W/S: [Sunshine Water](#)

BCC: [3: Constantine](#)

Agenda: [3/22](#)



200 Weathersfield Avenue  
Altamonte Spring, Florida  
United States 32714

T 866.842.8432

[www.sunshinewater.com](http://www.sunshinewater.com)

## AUTHORIZATION by owner of property to agent for execution of Land Use Approvals and Building Permits.

Date 12/12/2023

The undersigned states that he/she is an owner of property in Seminole County and that he/she authorizes Black & Veatch to execute the application and documentation to secure Land Use Approvals and Building Permit for installation of 50-foot poles and associated equipment for Advanced Metering Infrastructure (AMI) implementation.

300 RADEBAUGH DR LONGWOOD, FL 32779 EASEMENT

(Address)

06-21-29-504-0000-0010

(Parcel ID of Property)

Brenda Pearce

**Agent Name Printed**

**Signature of Agent**

563 West Hillsborough Ave Florahome FL 32140

**Address**

(678) 656-5179 Pearceb@bv.com

**Telephone Number**

Sean Twomey

**Owner Name Printed**

*Sean Twomey*

**Signature of Owner**

200 Weathersfield Av., Altamonte Springs, FL, 32714

**Address**

407.312.1815

**Telephone Number**

## **AMI PROJECT OVERVIEW**

### **Company Overview**

Sunshine Water Services Company (SWS) is a water & wastewater utility that has been operating in Florida since 1976. SWS provides service to nearly 70,000 customers across 10 different counties. In Seminole County, SWS serves approximately 15,000 premises with either water, wastewater, or both. One of our largest service areas is “Sanlando”, in unincorporated Seminole County, where we serve a large portion of the Wekiva Springs area.

### **What is AMI?**

AMI, also known as Advanced Metering Infrastructure, is a new water metering system that provides remote meter reading capabilities. AMI meters send a signal, either through cellular or to a LoRaWAN (low-power, wide area networking protocol) collector which feeds the overall system with the meter reads and other available information. AMI is designed to provide a monitoring system of water usage to residential and commercial properties, which will not only allow the water utility (SWS) to know what the usage is but will also supply the customer with data of their usage on a regular and easier-to-use basis. AMI, combined with the necessary software such as SWS My Utility Account, allows the customer to monitor their residence for leaks and to be more aware of their usage when they are not home.

### **SWS AMI PROJECT**

SWS has contracted with meter manufacturer, Neptune, to provide AMI and it's capabilities to all SWS water customers. The AMI installation will require the replacement of older mechanical meters with AMI. There are approximately 14,750 meters in Seminole County that will be replaced with AMI prior to the end of 2024.

The upgrade to AMI technology will provide significant benefits to our customers including,

- Detection of leaks and customer notification through My Utility Account,
- Eliminates the need for manual and estimated reads,
- Reduction in high-bill cases because customers will have more information to evaluate their usage,
- Greenhouse gas reductions with the reduction of “truck rolls” to obtain manual meter reads.

The majority of AMI meters in Seminole County will use LoRaWAN technology to supply meter read data back to the system. The use of LoRaWAN requires the installation of gateway poles with specific antenna technology to collect the data for a region of AMI meters while others will be served by cellular technology.

Round Tapered Direct Burial Aluminum Light Pole 40 Foot Above Grade, 8 Inch Diameter, 0.219 Inch Wall Thickness

**PRODUCT DESCRIPTION**

**Pole Top Options:** Poles are provided with either a removable top cap or a welded aluminum tenon. A 2-3/8 inch outside diameter tenon with 4 inches in length is the most common; however, other tenon options are available. Customers should confirm the appropriate tenon size required by their project prior to ordering. Poles with a top cap can also be drilled during fabrication. The drill pattern and orientation need to be provided by the customer unless Energy Light fixtures are being used for the project.

**Pole Shaft:** The pole shaft will be constructed of seamless extruded tube of 6063 aluminum alloy per the requirements of ASTM B221. The shaft assembly shall be full-length heat treated to produce a T6 temper.



**Handhole:** A reinforced handhole with grounding provision is provided at 18 inches from the base end of the pole assembly. Each handhole includes a cover and the attachment hardware.

**Color and Finish Options:** The standard finish for our aluminum light poles is a natural aluminum finish. Our poles are also available with a commercial grade, powder coat finish for an additional charge. Standard color options include dark bronze, black, gray, green, and white; however, custom color options are also available.

**Other Options:** The Following options are available. Please consult one of our light pole experts for details: Custom tenon size, custom color, electric/GFI outlet, custom pole height and additional handholes. Anti-Rotational Modification is also an option. Poles will be partially flattened into an anti-rotational, oval cross section, for added stability.

Specification Table		
Mounting Height (ft.)	A	40
Top Diameter (in.)	B	4.5
Butt Diameter (in.)	C	8
Wall Thickness (in.)	D	0.219
Handhole (in.)	E	4 x 6
Embedment (ft.)	F	5

Maximum EPA with 1.3 Gust Factor:		
90 mph:	12.8	Square Feet
100 mph:	9.2	Square Feet
120 mph:	6.4	Square Feet
130 mph:	5.2	Square Feet

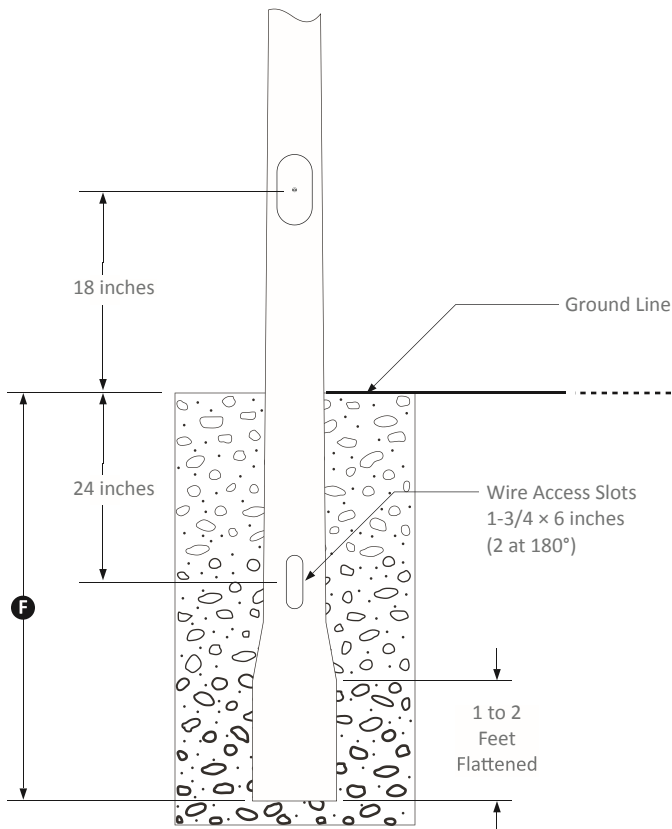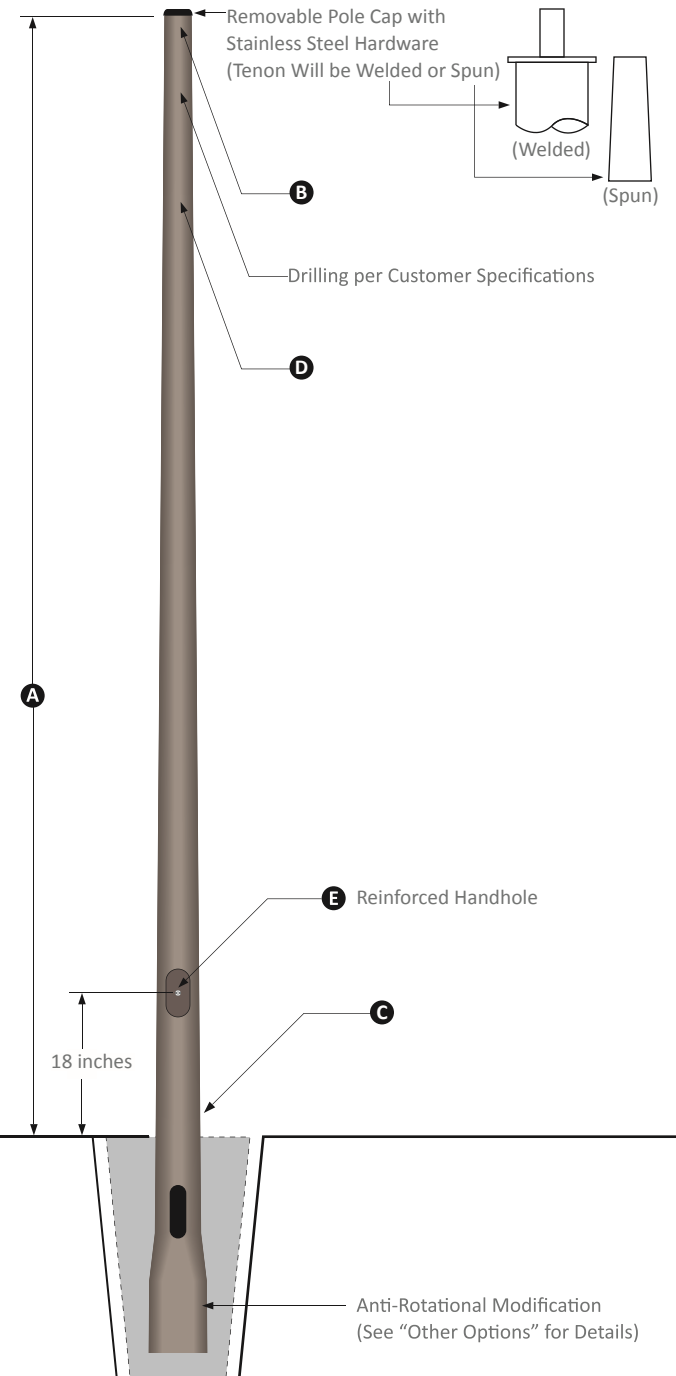



MFB9155

### 900/800 MHz MAXRAD Fiberglass Base Station (MFB) Omnidirectional Antennas

The MFB 900/800 MHz series are base matched half wave antennas encapsulated in heavy duty fiberglass radomes with a thick walled aluminum mounting base for reliable long term use. All models are DC grounded and UPS shippable.

#### Features

- White ultra-violet resistant pultruded fiberglass radome
- Thick walled aluminum mounting base
- Unity/3 dB/5 dB/7 dB models
- UPS shippable
- Factory tuned



#### Technical Data

Maximum Power: 150 watts
Normal Impedance: 50 ohms
Radome Material: 1.0" OD pultruded white fiberglass
Radiator Material: Coated steel wire
ESD Protection: DC grounded
Wind Survival: 100 mph
Termination: Unity and 3 dB models, N Female
Mounting Base Diameter: 1-5/16"
Mounting Method: Mast or wall mounted. Mounting hardware is sold separately. MMK1: light duty mast mount for antennas under 30" MMK3: light duty mast mount for antennas over 30" MMK4: heavy duty mast mount MMK6: cast mounting bracket MMK9: Aluminum mast mount for 1-5/16" OD antennas MBSWM: wall mounting bracket for antennas over 30" (two are required)



MMK3



MMK1



MMK4



MMK6



MBSWM



MMK9

## Antenna Electrical Specifications

Model	Frequency Range	Factory Tuned Frequency	Gain	Bandwidth @ 1.5:1 VSWR	Vertical Beamwidth @ 1/2 Power
MFB8130	806-866 MHz	813 MHz	Unity	40 MHz	75°
MFB8133	806-866 MHz	813 MHz	3 dB	30 MHz	40°
MFB8135	806-866 MHz	813 MHz	5 dB	20 MHz	22°
MFB8580	806-866 MHz	858 MHz	Unity	40 MHz	75°
MFB8583	806-866 MHz	858 MHz	3 dB	30 MHz	40°
MFB8585	806-866 MHz	858 MHz	5 dB	20 MHz	22°
MFB8353	824-896 MHz	835 MHz	3 dB	30 MHz	40°
MFBW8903	890-960 MHz	N/A	3 dB	70 MHz	40°
MFBW8905	890-960 MHz	N/A	5 dB	70 MHz	22°
MFB8963	896-940 MHz	898 MHz	3 dB	30 MHz	40°
MFB8965(NF)	896-940 MHz	898 MHz	5 dB	20 MHz	22°
MFB9387	896-940 MHz	938 MHz	7 dB	20 MHz	17°
MFB8967(NF)	896-940 MHz	898 MHz	7 dB	20 MHz	17°
MFB9150	902-928 MHz	915 MHz	Unity	20 MHz	75°
MFB9153	902-928 MHz	915 MHz	3 dB	20 MHz	40°
MFB9155(NF)	902-928 MHz	915 MHz	5 dB	20 MHz	22°
MFB9155RPC	902-928 MHz	915 MHz	5 dB	20 MHz	22°
MFB9157(NF)*	902-928 MHz	915 MHz	7 dB	20 MHz	17°

\* Bandwidth @ 2.0:1 VSWR



## Main

Product or component type	All-In-One
Range of product	Homeline
Meter socket type	Ringed
Hub type	A

## Complementary

Line Rated Current	100 A
Short-circuit current	10 kA
Device mounting	Surface
Number of spaces	10
Number of circuits	20
Number of tandem circuit breakers	10
Electrical connection	Lugs line side Lugs service ground
AWG gauge	AWG 6...AWG 1 (aluminium/copper) line side AWG 8...AWG 4 (aluminium/copper) service ground
Device composition	Service disconnect (factory installed)
Service disconnect rated current	100 A
Branch circuit breaker rated current	80 A
Service feed location	OH
Bypass type	No bypass


## Environment

### Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0944 - Schneider Electric declaration of conformity	Compliant - since 0944 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations

### Contractual warranty

Warranty period	18 months
-----------------	-----------



SmartLine Design

Always On.

---

804 Lincoln Avenue • Saint Paul, MN 55105  
(612) 990-0266

February 27, 2024

Mark Kuiper  
LightMart

Re: Design Memo – PCTEL antenna pole, Orlando

Mark:

The attached calculations demonstrate conformance of the proposed pole assembly to the requirements of the 2023 Florida Building Code, based on a 160 mph design wind speed. The pole assembly has additional structural capacity to withstand wind speeds well above this level. In the very unlikely event that wind speeds increase to a level causing failure, the pole would likely buckle at the handhole location, forming a hinge at that location and causing the pole to deflect above that point, and remain in a deflected position.

Regards,


I HEREBY CERTIFY THAT THIS REPORT WAS PREPARED BY ME AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF FLORIDA

Chris Arlandson, P.E

Enclosure: Pole wind analysis





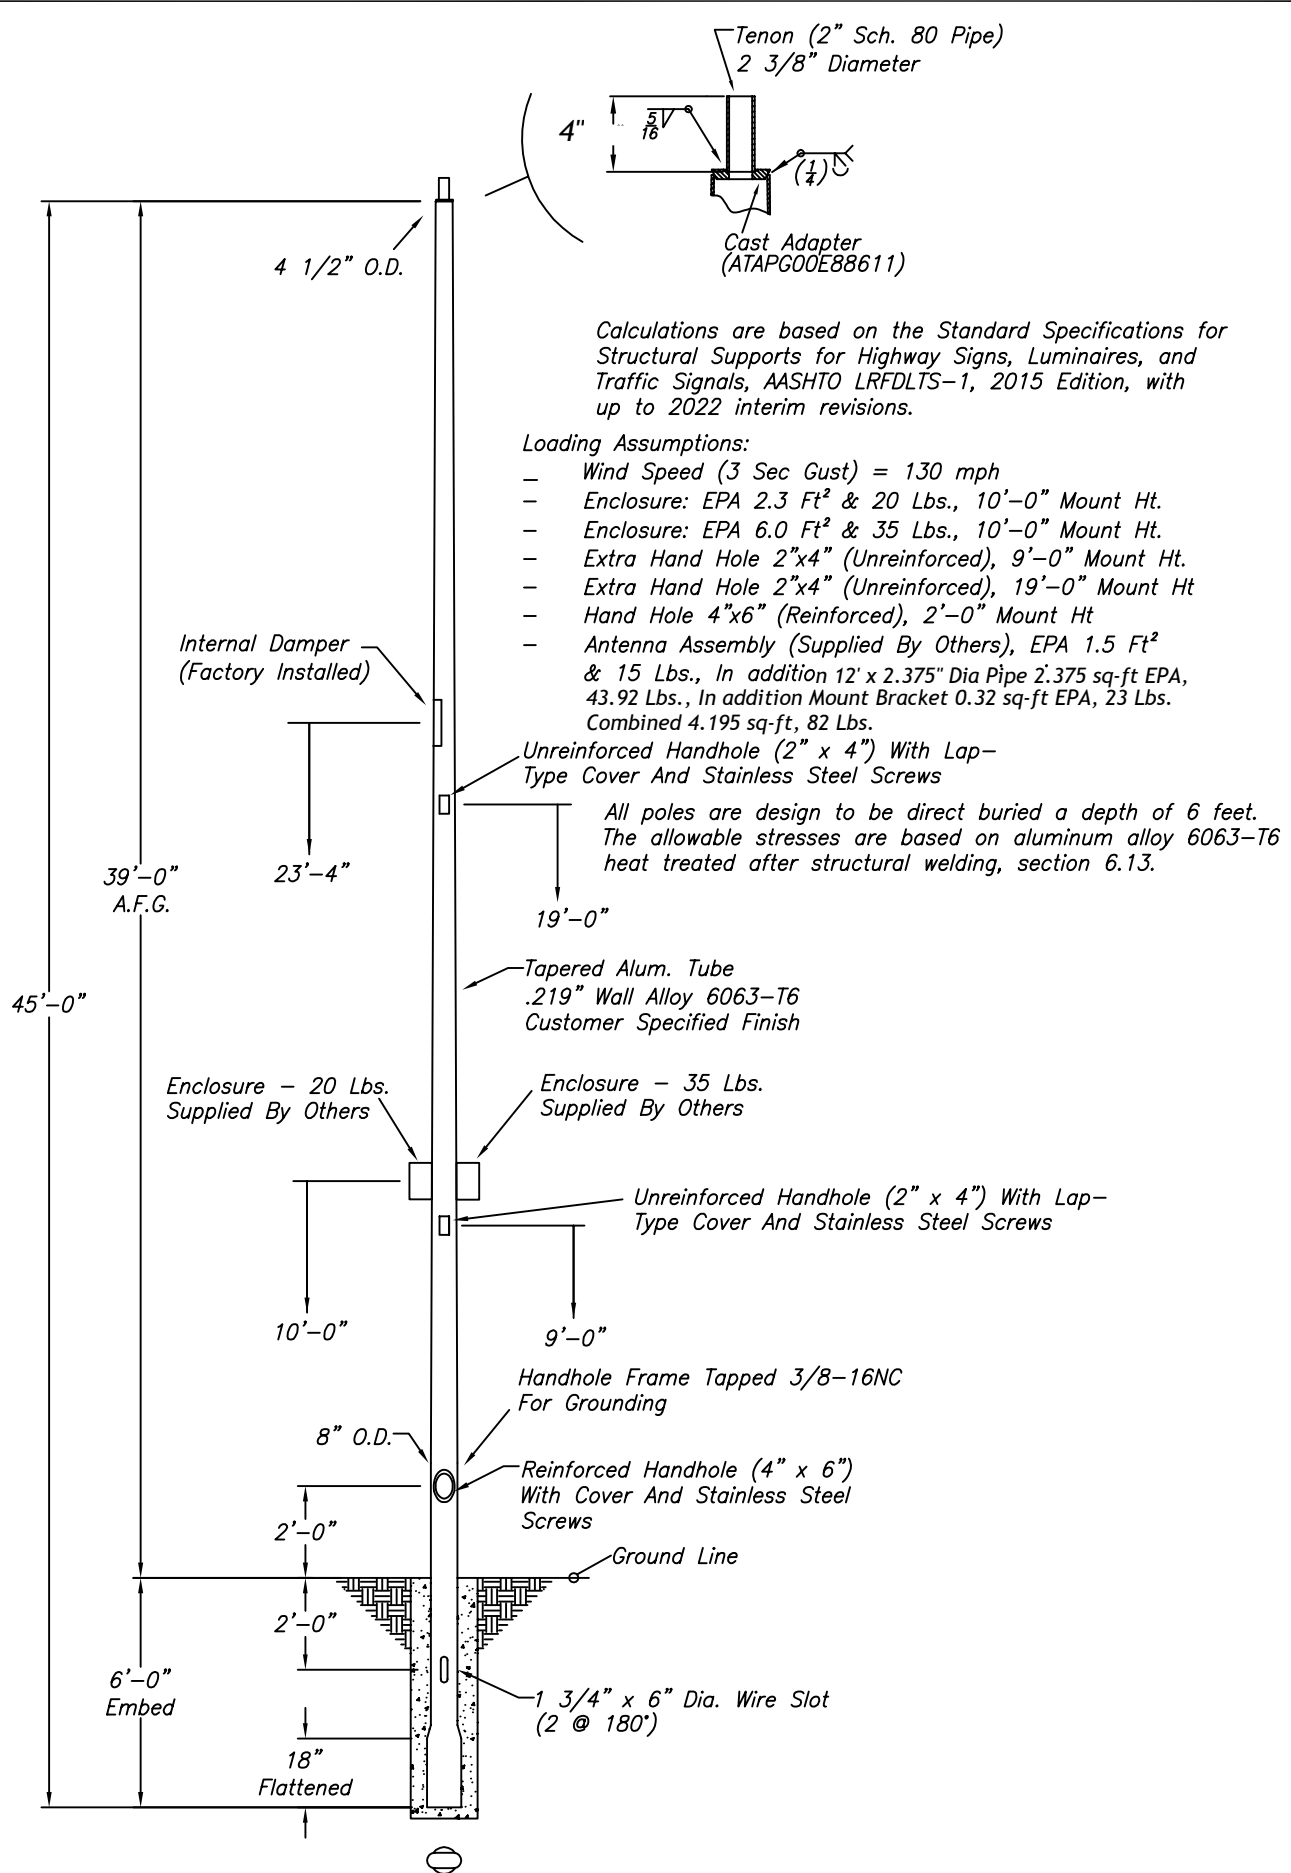

NO.	REVISIONS	DATE
1	Revised per customer request	2/24

**WARNING: DO NOT INSTALL LIGHTING POLES WITHOUT LUMINAIRES**

**hapco**  
Abingdon, Va.

TITLE 39' EMBEDDED LIGHTING POLE

CUSTOMER

SCALE NTS DATE 2/6/2024

BY JED DWG. NO.

CHK'D RTA39E8BD-Pxx

Project Name: PCTEL ANTENNA POLE, Orlando  
 Work Order No.: SO148306  
 Part Number: RTA39E8BD pole + MFB9155 antenna

February 27, 2024

Pole Cat. No.: PS44S18-125-HB MODIFIED

INPUT DATA

Design Standard: 2020 FBC

(ASD Design, 3-sec. gust wind speed)

Pole Material: ALUMINUM  
 Pole Material Specification: 6063T6  
 Pole Shaft Shape: ROUND  
 Rooftop Mounted: NO

Base Plate Material: ALUMINUM  
 Base Plate Material Spec.: 356T6  
 Bolt Material Specification: F1554 Gr 55  
 Weld Electrode Spec.: RE4043

Wind Velocity: (V) 160 mph  
 Exposure Category: C  
 Structure Category: II

Pole Ultimate Strength 85% Table A.3.4 25500 psi  
 Pole Yield Strength 85% Table A.3.4 21250 psi  
 Plate All. Bending Stress 6700 psi

Pole Natural Frequency (n1) 1.093 RIGID  
 Gust Factor: (G): 0.85 Sec. 26.9.5

Pole Length: (L) 39 ft.  
 Pole Base Height AGL: ft.  
 Tip Width: (b<sub>t</sub>) 4.5 in.  
 Butt Width: (b<sub>b</sub>) 8 in.  
 Nom. Wall Thickness: (t) 0.219 in.

Compressive Yield Strength 85% Table A.3.4 21250 psi  
 Shear Ultimate Strength 85% Table A.3.4 16150 psi  
 Shear Yield Strength 85% Table A.3.4 11900 psi

Dampening Factor: (β) 0.02

	Antenna+Arm	2 enclosures	meter encl.	Max.	
MAX. EPA	2.7	1.5	0.9		ft. <sup>2</sup>
Hgt. from Tip	7	-29	-34		ft.
Weight	88	55	22		lbf
Offset	0	4	3		in.

CALCULATED PROPERTIES

Cross-Sectional Area: (A) 5.35 in<sup>2</sup>  
 Butt Section Modulus: (S<sub>xx</sub>) 10.1 in<sup>3</sup>  
 Butt Section Mod. - Diag.: (S<sub>diag</sub>) 10.1 in<sup>3</sup>  
 Weight of Pole 188.8 lbf  
 Bolt Area Excl. Thread 0.00 in<sup>2</sup>

WIND LOAD ANALYSIS

Segment	A <sub>sq</sub> ft <sup>2</sup>	A <sub>diag</sub> ft <sup>2</sup>	Centroid Hgt ft	Kz	Cf (sq)	qz (sq) psf	F (sq) lbf	GLM (sq) ft*lbf
1	9.16	9.16	7.5	0.85	0.70	52.9	288	2163
2	2.68	2.68	17.5	0.88	0.70	54.6	87	1523
Fixture @ Tip	2.7		46	1.07	1	66.9	154	7064
Attachment 2	1.5		10	0.85	1	52.9	67	693
Attachment 3	0.9		5	0.85	1	52.9	40	208
Summation							637	11651

COMPONENT ANALYSES

POLE

	Actual Stress	All. Stress	psi	Unity Check(s)
Orthogonal Bending	8275	24049	psi	fb/Fb 0.34
Axial	66	17129	psi	fa/Fa 0.00
Shear	119	6462	psi	fv/Fv 0.02

SUMMARY

POLE Moment	11651	ft*lbf	
Shear	637	lbf	
Axial	354	lbf	
CSR	0.35	<< PASS >>	

POLE BASE ANALYSIS

d = proposed embedment, ft A = 2.34P/S<sub>b</sub> P = applied lateral force, lbs  
 b = diagonal dimension of embedded portion (taken @ 2/3 embedment depth), ft  
 h = distance from ground to application of resultant "P" (h = ΣM/ΣP), ft


d, ft.	P, lb.	S1	b, ft.	A, ft <sup>2</sup>	ΣM, lb-ft	h, ft.	d <sub>req.</sub> , ft.
6	637	1005	1.33	1.12	11651	18.29	5.5

LATERAL BEARING value= 250\* \*double for isolated poles

16" dia. backfill w/compacted 57 stone; 6' embedment OK? YES





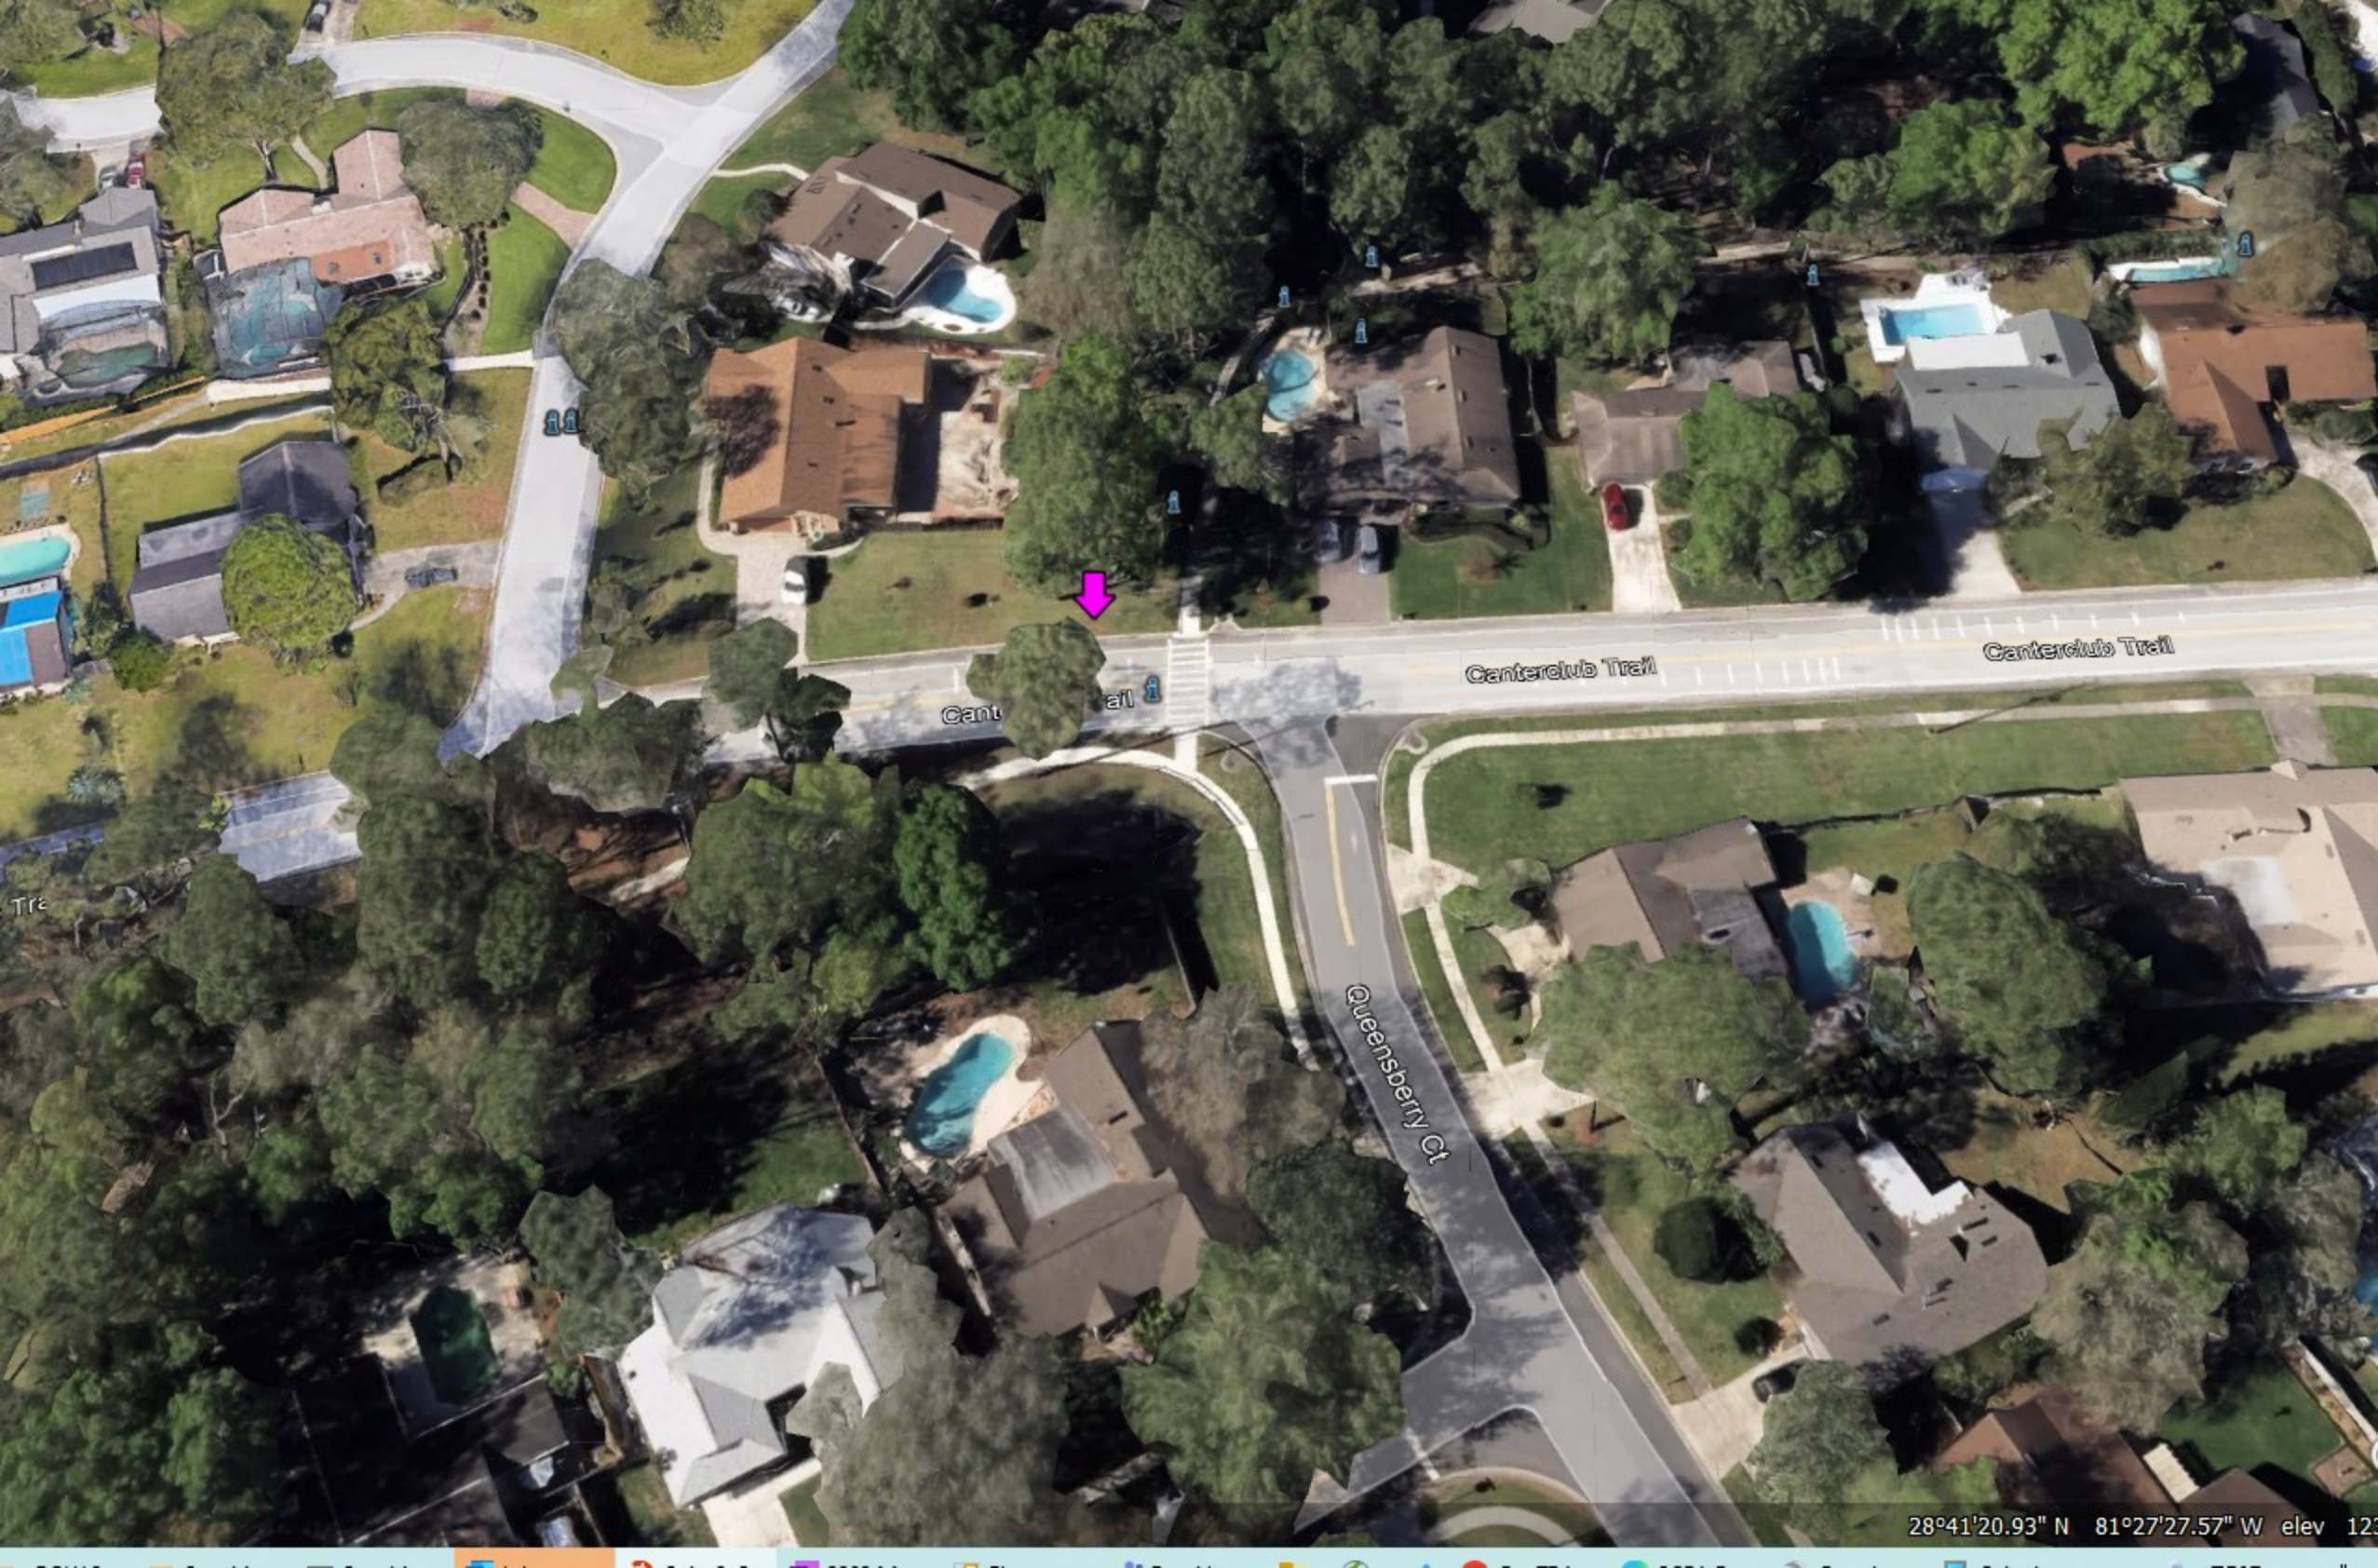



# Property Re or r



Pre 06-21-29-504-0000-0010

Property Address 300 RADEBAU H DR LON WOOD, FL 32779

## Pre Location

## Site View



06212950400000010 12/08/2021

## Pre Information

## Value Summary

Pre	06-21-29-504-0000-0010
Owner(s)	KIESEL, KENNETH - Tenancy by Entirety KIESEL, CHRISTINE - Tenancy by Entirety
Property Address	300 RADEBAU H DR LON WOOD, FL 32779
Mng	300 RADEBAU H DR LON WOOD, FL 32779-4527
Sub vs on N me	WEKIVA HILLS SEC 03
T x D str t	01-COUNTY-TX DIST 1
DOR Use o e	01-SIN LE FAMILY
Exempt ons	00-HOMESTEAD(1994)
AG ss f ton	No

	2024 Working Values	2023 ert f e ues
V u tion Metho	Cost/Market	Cost/Market
Number of Bui ings	1	1
Depre i te B g V ue	\$308,235	\$271,570
Depre i te EXFT V ue	\$24,600	\$24,400
L n V ue (M rket)	\$80,000	\$80,000
L n V ue Ag		
Just/M rket V ue	\$412,835	\$375,970
Port bi ity A j		
S ve Our Homes A j	\$215,289	\$184,178
Non-Hx 10% p (AMD 1)	\$0	\$0
P&G A j	\$0	\$0
Assesse V ue	\$197,546	\$191,792

## 2023 ert f e T x Summ ry

2023 T x Amount w/o Exemptions **\$5,003.41**    2023 T x S vings with Exemptions **\$2,981.99**  
 2023 T x Bi Amount **\$2,021.42**

\* Does NOT IN LUDE Non A V orem Assessments

## Leg Des ription

LOT 1  
WEKIVA HILLS SEC 3  
PB 20 P 94

## Taxes

Taxing Agency	Assessed Value	Exempt Values	Taxable Value
ROAD DISTRICT	\$ 97,546	\$50,000	\$ 47,546
SJWM(Saint Johns Water Management)	\$ 97,546	\$50,000	\$ 47,546
FIRE	\$ 97,546	\$50,000	\$ 47,546
COUNTY GENERAL FUND	\$ 97,546	\$50,000	\$ 47,546
Schools	\$ 97,546	\$25,000	\$ 72,546

## Sales

Description	Date	Book	Page	Amount	Qualified	Vac/Imp
WARRANTY DEED	10 / 1992	0252	087	\$ 20,000	Yes	Improved
WARRANTY DEED	04/0 / 1978	066	0849	\$59,800	Yes	Improved
WARRANTY DEED	10 / 1977	046	072	\$ 0,700	No	Vacant


## Land

Method	Frontage	Depth	Units	Units Price	Land Value
LOT				\$80,000.00	\$80,000

## Building Information

#	Description	Year Built**	Bed	Bath	Fixtures	Base Area	Total SF	Living SF	Ext Wall	Adj Value	Repl Value	Appendages
---	-------------	--------------	-----	------	----------	-----------	----------	-----------	----------	-----------	------------	------------

1	SINGLE FAMILY	1978/1998	3	2.0	7	1,976	3,020	2,496	CB/STUCCO FINISH	\$308,235	\$342,483	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Description</th> <th style="text-align: right;">Area</th> </tr> </thead> <tbody> <tr> <td>GARAGE FINISHED</td> <td style="text-align: right;">484.00</td> </tr> <tr> <td>OPEN PORCH FINISHED</td> <td style="text-align: right;">40.00</td> </tr> <tr> <td>ENCLOSED PORCH FINISHED</td> <td style="text-align: right;">520.00</td> </tr> </tbody> </table>	Description	Area	GARAGE FINISHED	484.00	OPEN PORCH FINISHED	40.00	ENCLOSED PORCH FINISHED	520.00
Description	Area																			
GARAGE FINISHED	484.00																			
OPEN PORCH FINISHED	40.00																			
ENCLOSED PORCH FINISHED	520.00																			

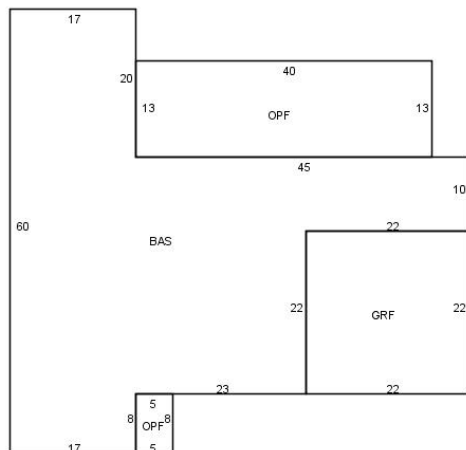

Building 1 - Page 1

\*\* Year Built (Actual / Effective)

## Permits

Permit #	Description	Agency	Amount	CO Date	Permit Date
06179	MECHANICAL & CONDENSOR	County	4,695		7/6/2000
07485	REROOF W/SHINGLES	County	2,385		6/25/2004
08101	SCREEN ROOM	County	17,000		6/11/2018
00112	MAIN BREAKER PANEL & FEEDER W/RE	County	1,475		1/3/2018
03151	300 RADEBAUGH DR: REROOF RESIDENTIAL [WEK VA H LLS SEC 03]	County	4,686		3/6/2018
00434	300 RADEBAUGH DR: REROOF RESIDENTIAL-Single family residential [WEK VA H LLS SEC 03]	County	12,000		1/13/2020
01868	300 RADEBAUGH DR: EZ WINDOW / DOOR REPLACEMENT RESIDENTIAL- [WEK VA H LLS SEC 03]	County	5,447		2/10/2020
16777	300 RADEBAUGH DR: PLUMBING - RESIDENTIAL- [WEK VA H LLS SEC 03]	County	6,330		10/13/2020
12932	300 RADEBAUGH DR: FENCE/WALL RESIDENTIAL-fence [WEK VA H LLS SEC 03]	County	5,000		8/26/2022

## Extra Features

Description	Year Built	Units	Value	New Cost
POOL 1	10/01/1982	1	\$21,000	\$35,000
SCREEN ENCL 2	10/01/1982	1	\$3,600	\$9,000

## Zoning

Zoning	Zoning Description	Future Land Use	Future Land Use Description
PD	Planned Development	PD	Planned Development

## Utility Information

Fire Station	Power	Phone (Analog)	Water Provider	Sewer Provider	Garbage Pickup	Recycle	Yard Waste	Hauler
13.00	DUKE	CENTURY LINK	SUNSHINE WATER SERVICES	SUNSHINE WATER SERVICES	MON/THU	MON	WED	Waste Management

## Political Representation

Commissioner	US Congress	State House	State Senate	Voting Precinct
Dist 3 - Lee Constantine	Dist 7 - Cory Mills	Dist 39 - DOUG BANKSON	Dist 10 - Jason Brodeur	33

## Service Information

Elementary School District	Middle School District	High School District
Wekiva	Teague	Lake Brantley

Copyright 2024 © Seminole County Property Appraiser



**Seminole County Government  
Development Services Department  
Planning and Development Division  
Credit Card Payment Receipt**

If you have questions about your application or payment, please email us [eplandesk@seminolecountyfl.gov](mailto:eplandesk@seminolecountyfl.gov) or call us at: (407) 665-7371.

**Receipt Details**

**Date:** 3/4/2024 3:39:33 PM  
**Project:** 24-80000036  
**Credit Card Number:** 42\*\*\*\*\*9173  
**Authorization Number:** 015619  
**Transaction Number:** 04032402C-7B060684-5787-41D0-9AFF-E8B990152D06  
**Total Fees Paid:** 52.50

**Fees Paid**

<b>Description</b>	<b>Amount</b>
CC CONVENIENCE FEE -- PZ	2.50
PRE APPLICATION	50.00
<b>Total Amount</b>	<b>52.50</b>